


**Across**

- 2 The 4th step in the 5 steps to risk assessment (6)
- 4 HSWA Section 2(2)(a) requires the employer to provide safe \_\_\_\_\_ and systems of work (5)
- 6 Severity x Likelihood (4)
- 7 A method of proactive monitoring, normally using a checklist (10)
- 10 Common law is based on the principal of judicial \_\_\_\_\_ (9)
- 11 Class B fires involve flammable \_\_\_\_\_ (7)
- 14 The shape of warning signs (8)
- 17 All organisations should be striving for a positive one (7)
- 19 These systems should be tested and inspected every 14 months (3)
- 20 A reportable disease contracted from rats (13)
- 24 A duty we have no choice in (8)
- 25 This section of a H&S policy should detail who does what (12)
- 28 A detailed, systematic review of a health & safety management system (5)
- 31 Something with the potential to cause harm (6)
- 32 Skills, knowledge, ability, training and experience combine to form this (10)
- 34 The ideal choice in the hierarchy of control (11)

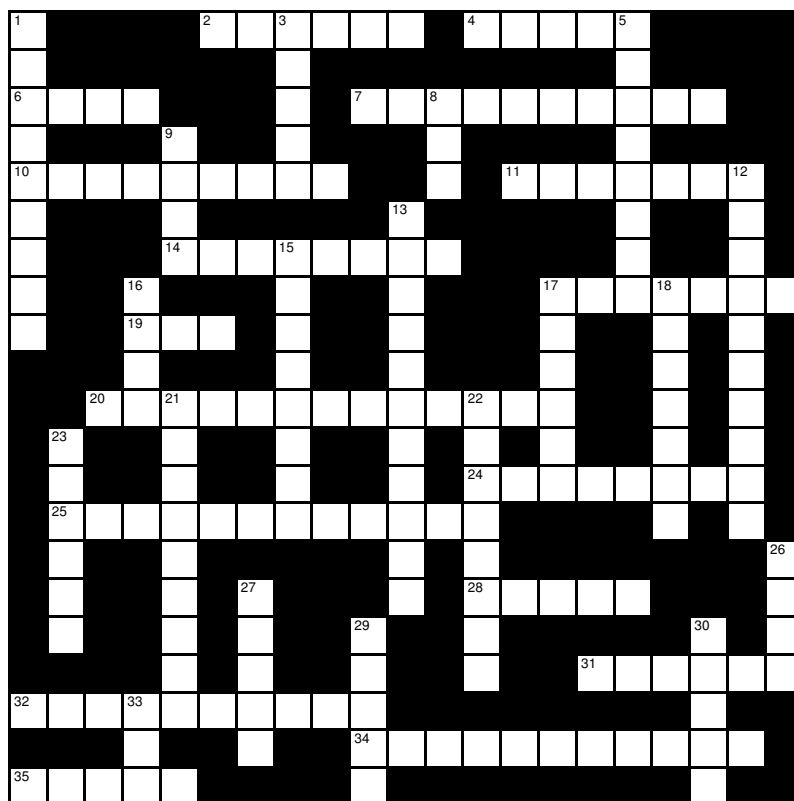

- 17 All organisations should be striving for a positive one (7)
- 19 These systems should be tested and inspected every 14 months (3)
- 20 A reportable disease contracted from rats (13)
- 24 A duty we have no choice in (8)
- 25 This section of a H&S policy should detail who does what (12)
- 28 A detailed, systematic review of a health & safety management system (5)
- 31 Something with the potential to cause harm (6)
- 32 Skills, knowledge, ability, training and experience combine to form this (10)
- 34 The ideal choice in the hierarchy of control (11)

- 35 HSE Inspectors have a right to do this at any reasonable time (5)

**Down**

- 1 The \_\_\_\_\_ (Health, Safety & Welfare) Regulations 1992 cover temperature and lighting at work (9)
- 3 This court can give unlimited fines and jail sentences of up to 2 years for H&S offences (5)
- 5 Appeals against enforcement notices are heard at an Employment \_\_\_\_\_ (8)
- 8 Lifting equipment that is used to lift people should be tested/inspected every \_\_\_\_\_ months (3)

- 9 One of the three elements in the fire triangle (4)
- 12 Vehicles and pedestrians should be this wherever possible (10)
- 13 A common ignition source (11)
- 15 Killer construction material commonly used from the 1950's to 1980's (8)
- 16 The colour of the band on dry powder fire extinguishers (4)
- 17 The primary reason for accident investigation is to find these and prevent a recurrence (6)
- 18 A reportable disease which is found in the soil (7)
- 21 Safety audits are a \_\_\_\_\_ measure (9)

- 22 The upright scaffold pole (8)
- 23 Control measures that rely on these are less effective than those that don't (6)
- 26 One of the four main factors to consider in a manual handling risk assessment (4)
- 27 The ideal choice of guard in the hierarchy of machinery safeguarding (5)
- 29 The colour of a safe condition sign (5)
- 30 A broken arm would be classed as this kind of injury under RIDDOR (5)
- 33 The last resort in the hierarchy of control (3)